


## Extra long gloves offering reliable performance and chemical splash protection

- **Extended protection:** The extended 355mm length provides increases protection against cross-contamination risks
- **Comfort and durability:** Strong, comfortable nitrile material resists tearing and protects in the event of chemical splashes
- **Easy donning:** An extra wash during manufacturing makes these gloves ultra-smooth for easier donning, doffing and double gloving
- **Reduced allergy risk:** Manufactured without chemical accelerators, helping to protect users from Type IV skin allergies
- **Secure grip:** Fully textured design enhances grip in laboratory, food-processing and other applications

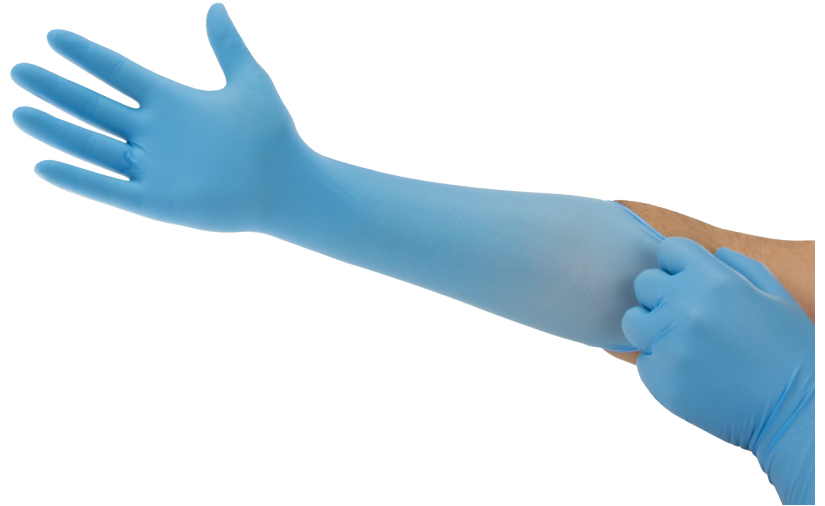

### Industries

- Electronics
- Food Processing
- Industrial
- Janitorial / Sanitation
- Life Sciences
- Manufacturing
- Recycling and Waste Disposal

### Recommended For

- Blending, compounding materials
- Food processing and handling
- Handling of tools
- Handling of paint/glue guns and sprayers
- Laboratory analysis
- Maintenance and equipment clean up
- Chemical Handling

# TECHNICAL DATA SHEET

| Product Information    |  |
|------------------------|--|
| External Glove Surface | Fully Textured   |
| Audit Standards        | ISO 13485, ISO 9001  |
| Packaging Overview     | 50 gloves per dispenser<br>10 dispensers per case<br>500 gloves per case                                 |
| Storage Instructions   | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| Country Of Origin      | Malaysia   |
| Product Segmentation   | High Risk  |
| Antistatic             | Yes EN1149   |

## PHYSICAL PROPERTIES

|   | Typical Values      |                    | Testing Method      |
|---|---------------------|--------------------|---------------------|
| Length (mm/inches)                      | 355 / 14            |                    | ASTM D3767,EN 420   |
| Freedom from Holes (Inspection level I) | 1.5 AQL             |                    | ASTM D5151,EN 455-1 |
| Palm Thickness (mm/mils)                | 0.17 / 6.7          |                    | ASTM D3767,EN 420   |
| Finger Thickness (mm/mils)              | 0.20 / 7.9          |                    | ASTM D3767,EN 420   |
|   | <b>BEFORE AGING</b> | <b>AFTER AGING</b> |                     |
| Ultimate Tensile Strength (MPa)         | ≥14                 | ≥ 14               | ASTM D412 & D573    |
| Elongation at Break (%)                 | ≥ 500               | ≥ 400              | ASTM D412           |
| Force at break (N)                      | ≥ 6                 | ≥ 6                | EN 455-2            |

## ORDERING INFORMATION

| Size         | S (6.5 - 7) | M (7.5 - 8) | L (8.5 - 9) | XL (9.5 - 10) | XXL (10.5 - 11) |
|--------------|-------------|-------------|-------------|---------------|-----------------|
| Product Code | 93163070    | 93163080    | 93163090    | 93163100      | 93163110        |

## Performance Standards and Regulatory Compliance



For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

### Asia Pacific Region

MY +603 8310 6688  
apac.medical@ansell.com  
CN: +86 21 38275000  
infochina@ansell.com  
JP: +813 5549 8151  
info.medical.jp@ansell.com

### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

### Latin America & Caribbean Region

BR +55 (11) 3356-3100  
latam.medical@ansell.com  
MX: +52 442 296 2050  
latam.medical@ansell.com  
CO: +57 1 288 3247  
latam.medical@ansell.com

### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

### Russia

Ansell PYC  
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

